

EXISAFE-1T






EXISAFE-1T is surface-mounted LED emergency luminaire for open spaces and corridors. Light fitting delivers an even, rotationally symmetrical light pattern.

Typical mounting height is 2.5–7 m. The IP55 rated luminaire is also well suited for humid locations. It has an ABS plastic body. The standard colour for the plastic parts is white (RAL9016). Black (RAL9017) is available as a special colour.

There is a flush-mounting frame (UPK-EXISAFE) available for the recessed installation of the luminaire. A hole with a 165 mm diameter is used for the recessed installation.

Typical applications for the luminaire include office premises, car parks, warehouse and production facilities, schools and day-care centres.

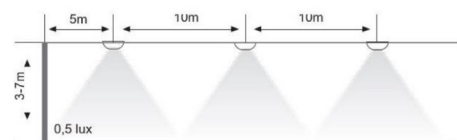

In open areas the spacing of luminaires at 10 m mounting height is 3–7 m.

EXIOT LUMINAIRES

TYPE	ELECTRICAL NO. (FI)	VOLTAGE	POWER INPUT	LIGHT SOURCE	IP CLASS	MOUNTING	BATTERY
EXISAFE-1T/W	4129220	230 V	2W	LED	55	MMJ 3×1,5mm ²	Li-ion 7,4V / 600 mAh

ADDRESSABLE LUMINAIRES

TYPE	ELECTRICAL NO. (FI)	VOLTAGE	POWER INPUT	LIGHT SOURCE	IP CLASS	MOUNTING	BATTERY
EXISAFE-1T/C	4228631	65V DC	2W	LED	55	-o-KLMA 2×0,8+0,8	Li-ion 7,4V/ 600 mAh
EXISAFE-1T/P	4228632	65V DC	2W	LED	55	FRHF - JE-H(St) H..Bd 2×0,8+0,8	Central battery system

24V AND 230V LUMINAIRES

TYPE	ELECTRICAL NO. (FI)	VOLTAGE	POWER INPUT	LIGHT SOURCE	IP CLASS	MOUNTING	BATTERY
EXISAFE-1T	4228630	230V AC/DC	3W	LED	55	-o-3×2,5mm ²	Central battery system
EXISAFE-1T/24	4228633	24V DC	3W	LED	55	-o-3×2,5mm ²	Central battery system