



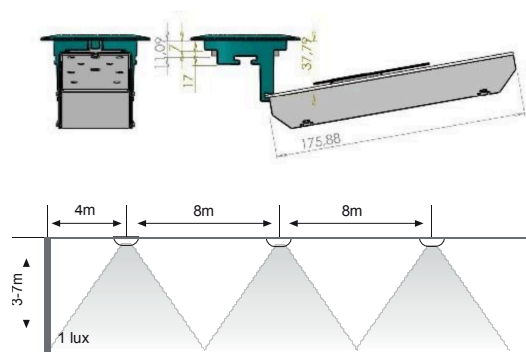

LED-2T/U is an emergency luminaire designed for illuminating corridors and exit routes. It is equipped with a lens that delivers a long and narrow light pattern. Luminaires are typically installed at a height of 2.5–7 m and up to 24 m apart.

Applications include long corridors and exit routes. Luminaire is IP44 rated and has an ABS plastic body. The standard colour for the plastic parts is white (RAL9016).

Applications: buildings with long corridors, including office buildings, hospitals, schools, warehouses and business premises.

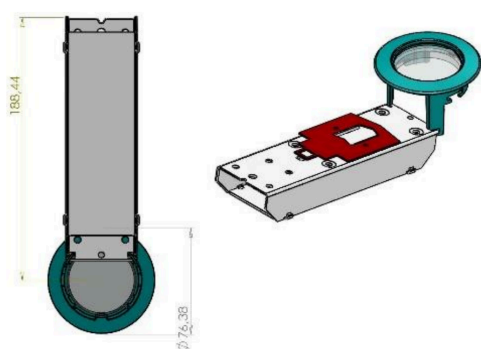

Valaisimien asennusväli 8 m asennuskorkeudella 3–7 m.

EXIOT LUMINAIRES

TYPE	ELECTRICAL NO. (FI)	VOLTAGE	POWER INPUT	LIGHT SOURCE	IP CLASS	MOUNTING	BATTERY
LED-2T/U/W	4129515	230V	2W	LED	44	MMJ 3×1,5mm ²	7,4V / 600mA

ADDRESSABLE LUMINAIRES

TYPE	ELECTRICAL NO. (FI)	VOLTAGE	POWER INPUT	LIGHT SOURCE	IP CLASS	MOUNTING	BATTERY
LED-2T/U/C	4228626	65 V DC	2W	LED	44	-o-KLMA 2×0,8+0,8, flush mount	7,4V / 600mAh
LED-2T/U/P	4228627	65 V DC	2W	LED	44	FRHF – JE-H(St) H..Bd 2×0,8+0,8	Central battery system

24V AND 230V LUMINAIRES

TYPE	ELECTRICAL NO. (FI)	VOLTAGE	POWER INPUT	LIGHT SOURCE	IP CLASS	MOUNTING	BATTERY
LED-2T/U	4228623	230 V AC / DC	3W	LED	44	-o-3×2,5mm, flush mount	Central battery system
LED-2T/U/24	4228624	24V DC	3W	LED	44	-o-3×2,5mm, flush mount	Central battery system