

# WIRELESS GUIDE LUMINAIRES


## ELX-1 / 2 / 4




ELX guide luminaire has an ABS plastic body and brackets. Sign is made of acrylic. ELX guide luminaire is available with three different viewing distances: 24, 42 and 60 m. Luminaire is IP41 rated, and a sealing flange can be used to raise the rating to IP55. Available in one and two-sided models.

ELX guide luminaire can be wall or ceiling mounted. A flush-mounting frame is also available.


Typical applications for ELX guide luminaires include office and business premises, day-care centres, schools, hospitals, health centres and sports halls. As the luminaire can reach a great IP rating with a seal flange, it is also used in humid and dusty applications, including car parks.

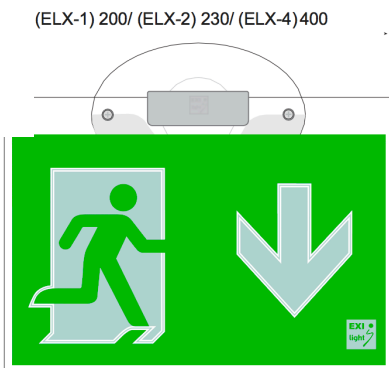


### WALL MOUNTING

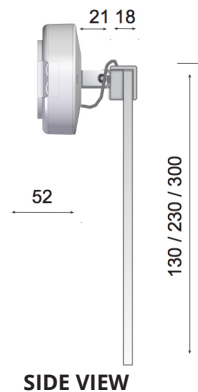

### CEILING MOUNTING

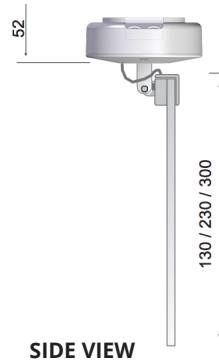

### TOP VIEW



## EXIOT LUMINAIRES

TYPE	ELECTRICAL NO. (FI)	VOLTAGE	POWER INPUT	LIGHT SOURCE	IP CLASS	RANGE	MOUNTING	BATTERY
ELX-1W-A	4228688	230 V	2 W	LED	41(55)	24 m	MMJ 3×1,5mm2	Li-Ion 7,4 V / 600 mAh
ELX-1W-AA	4228689	230 V	2 W	LED	41(55)	24 m	MMJ 3×1,5mm2	Li-Ion 7,4 V / 600 mAh
ELX-1W-O	4228690	230 V	2 W	LED	41(55)	24 m	MMJ 3×1,5mm2	Li-Ion 7,4 V / 600 mAh
ELX-1W-V	4228691	230 V	2 W	LED	41(55)	24 m	MMJ 3×1,5mm2	Li-Ion 7,4 V / 600 mAh
ELX-2W-A	4228692	230 V	2 W	LED	41(55)	42 m	MMJ 3×1,5mm2	Li-Ion 7,4 V / 600 mAh
ELX-2W-AA	4228693	230 V	2 W	LED	41(55)	42 m	MMJ 3×1,5mm2	Li-Ion 7,4 V / 600 mAh
ELX-2W-O	4228694	230 V	2 W	LED	41(55)	42 m	MMJ 3×1,5mm2	Li-Ion 7,4 V / 600 mAh
ELX-2W-V	4228695	230 V	2 W	LED	41(55)	42 m	MMJ 3×1,5mm2	Li-Ion 7,4 V / 600 mAh
ELX-4W-A	4228696	230 V	2 W	LED	41(55)	60 m	MMJ 3×1,5mm2	Li-Ion 7,4 V / 600 mAh
ELX-4W-AA	4228697	230 V	2 W	LED	41(55)	60 m	MMJ 3×1,5mm2	Li-Ion 7,4 V / 600 mAh
ELX-4W-O	4228698	230 V	2 W	LED	41(55)	60 m	MMJ 3×1,5mm2	Li-Ion 7,4 V / 600 mAh
ELX-4W-V	4228699	230 V	2 W	LED	41(55)	60 m	MMJ 3×1,5mm2	Li-Ion 7,4 V / 600 mAh